




SIMPLE AND CONVENIENT THE NEW FRIAMAT APP

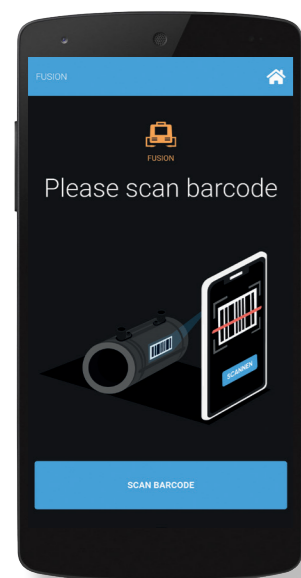


Simplified fusion process through intuitive input

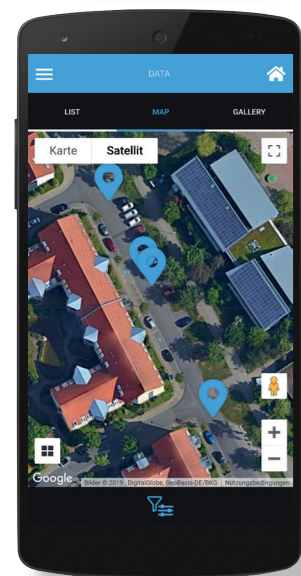


Clear display of work progress

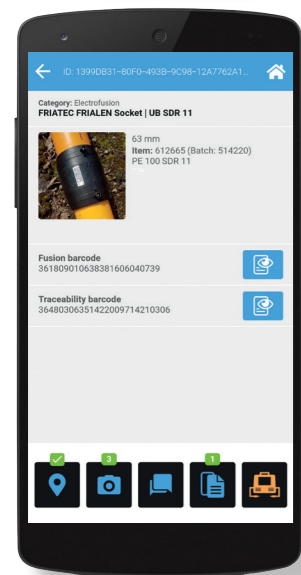


Detailed information on all products including images, geo data and comments

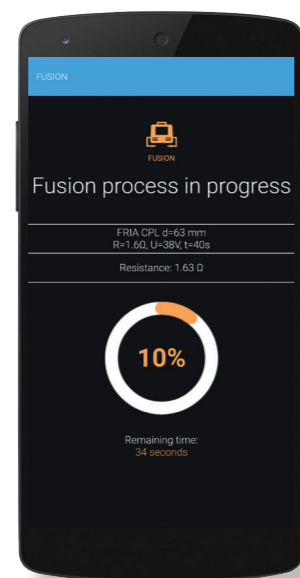

All fusion information always at a glance

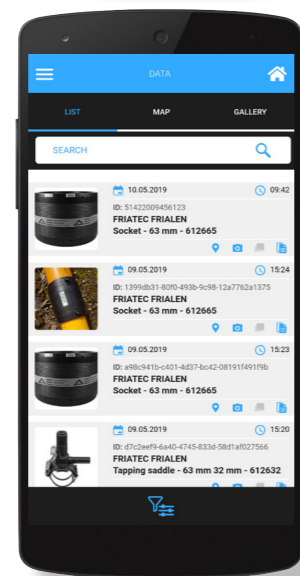

Product lists with extended information overview

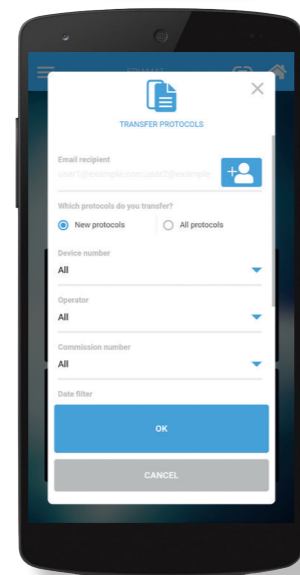

Direct dispatch of all or selected work records to one or more recipients at the same time

EQUIPMENT FEATURES THE NEW FRIAMAT

Technical details*	FRIAMAT prime eco
Type	Universal electrofusion unit with traceability and documentation function and bluetooth interface
Model with mini scanner	Order no. 611124
Model with reader wand	Order no. 613124
Maximum diameter	up to about d 1200 ***
Input voltage range	AC 190 V - 250 V
Frequency range	44 Hz ... 66 Hz
Input current	AC 16 A max.
Output	3,5 kW
Unit fuse	16 A slow acting
Fusion voltage	8 - 48 V
Output current	max. 110 A
Fusion current monitor	Short circuit and interruption
Barcode	Code 2/5 interleaved, Code 128
Documentation of fusion data	Yes
Documentation of traceability data	Yes
Operator pass	optional (Order no. 623100)
Internal protocol memory	20.000 protocols
Protocol format	PDF / CSV / FRIATRACE
Data transfer interface	USB / Bluetooth**
Manual barcode emergency entry	Yes
FRIAMAT preCheck	Yes
Working temperature range	-20 °C ... +50 °C
Languages	23
Power cable	5 m with shaped plug
Fusion cable	4 m with fitting connector, 4 mm diameter
Weight	about 18 kg
Dimensions	260 x 500 x 340 mm
Housing	IP 54 / Protection class I
Approval / Quality	CE, ISO 9001, WEEE-Reg.-Nr. DE 49130851, RoHS, REACH
Accessory	Operating manual, transport box

* Specifications subject to change.

** Not available in all countries.

*** With FRIAMAT prime eco the fusion of FRIALEN- and FRIAFIT-Safety fittings up to d 900 over the temperature range of -20°C up to +50°C is possible. Processing of fittings from other manufacturers up to d 1200 or eventually higher is basically possible. Please refer to the specific performance requirements of fittings from other manufacturers in consideration of the predominant processing temperature.

Aliaxis

FRIATEC GmbH
Steinzeugstrasse 50 - 68229 Mannheim, Germany
Phone +49 621 486-2828 - Fax +49 621 486-1598
info-friatools@friatec.de

www.friatools.de



Aliaxis



**FRIAMAT PRIME ECO
CONNECTING PIPES SMARTER**

With traceability and documentation function and bluetooth interface

www.friatools.de



EXPERIENCE, TECHNOLOGY, INNOVATION THE NEW FRIAMAT

Toroidal transformer technology with active cooling for reduced process times. High efficiency in continuous operation and when large fittings are processed.

WE MAKE YOUR JOB EASIER THE NEW FRIAMAT APP

With the FRIAMAT App you have everything under control at any time, online and offline, without registration!

Extra-long fusion cable (4m) and power cable (5m) for maximum freedom of movement on the construction site.

With new, handy mini-scanner or proven reader wand.

Controlling the FRIAMAT with the FRIAMAT APP. Read out fusion protocols and send them by email. Easily capture and assign site photos, comments and GPS data.

Comfortable operation of the FRIAMAT during the fusion process.

Filter and search functions for optimized display. Add additional information such as geo data, photos and comments quickly and easily.

High-resolution, extremely bright 4.3" TFT color display: The high-contrast graphic display remains legible even in the most unfavorable lighting conditions and from almost any position.

Intuitive user guidance through clear menu structure. Permanent display of environmental information for status control for the user.

Documentation of fusion and traceability data. Memory space for up to 20,000 fusion logs. Output as CSV or PDF file or in FRIATRACE format via commercially available USB stick. New: Charging of Smartphone via USB interface!

Robustly designed to suit tough conditions. The new housing geometry also allows a tilted position for easy operation.

Read barcodes and display all relevant data simply and clearly.

Easily send selected work results by email and document them comprehensively.